

Newport200 series RAISED PANEL

Newport 200 Insulated Steel Garage Doors

The Newport 200 offers homeowners, as well as home builders, the classic look of raised panel doors, one of the industry's highest insulation values, and the strength and practicality of pre-finished steel. This is a premium, highly energy efficient door featuring a calculated insulation value of R-18.

- Sandwich-type construction with 2" polyurethane insulation, pressure bonded between two skins of 26 gauge (.017) G60 steel
- Steel is rust-proofed with hot-dipped galvanizing, pre-painted on both sides with a primer, and finished with a top coat of baked on polyester for an exterior paint thickness of 1.0 mil
- Three layer construction provides a calculated insulation value of R-18, along with exceptional strength and a substantial, solid feel during operation
- · Finely detailed raised panels with a deep woodgrain texture
- · Panel options include Short Raised Panel, Long Raised Panel, and Flush Panel
- Tongue and Groove section joint with bulb seal
- Thermal break between steel skins
- 12 factory finish colors to choose from, including three wood look finishes

<u>Sizes</u>

Standard widths: 8', 9', 10', 12', 16' and 18' Special order widths are available in 1" increments up to 20'

Standard heights: 6'6", 7', 7'6", and 8'

7'6" & 8' tall doors are available as either 4 or 5 sections high

Number of Panels Across


Width	Short Panel/Long Panel	
8' & 9' wide	4	2
10' wide	5	2
12' wide	6	3
16' & 18' wide	8	4

Panel Options



Personalize the look of your Newport door by adding a custom window design

Window Options/snap-in Inserts

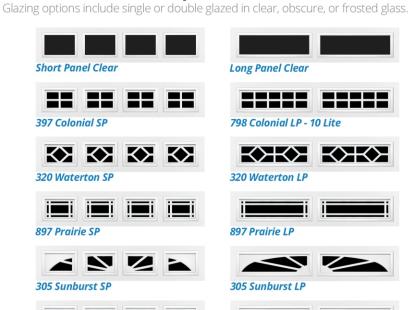


591 Cascade LP


587 Wyndbridge LP

588 Wyndbridge Arch LP

488 Somerton LP - 10 Lite



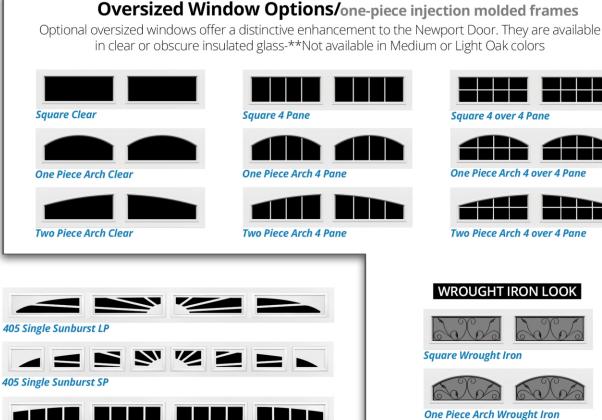





WROUGHT IRON LOOK



Color Options

591 Cascade SP - 4 Lite

393 Cathedral SP

306 Sherwood SP



488 & 798 Berkshire LP

Section joint detail

Modified tongue and groove joint-

Placed closer to the exterior of the door to limit air and water infiltration

Bulb seal-prevents air leaks

Thermal break-prevents heat transfer

Continuous polyurethane insulated core of high density foam resulting in a R-Value of 18

Continuous full width horizontal steel reinforcing strip for hinge attachment

Standard features of the Newport Series includes our tough, anti-corrosion protection - inside and out. Hardware includes heavy-duty track with a unique elliptical curve that reduces the force necessary to roll the door along the track, making opening and closing easier and smoother. Full leaf, heavy gauge hinges, and nylon rollers with steel bearings offer superior strength and years of trouble-free operation.



High-strength, rust-resistant, pre-painted galvanized steel sheets-

Available in a variety of colors to match the beauty of your home

Galvanized steel endcaps-

Heavy duty for additional strength

Deep woodgrain embossing-

The durability of steel without the maintenance hassle of wood

Flexible 3" vinyl bottom seal-

With a rust-resistant aluminum retainer



Lifetime limited warranty against rust-through and/or delamination of door face. See dealer for complete warranty information.

Green Building Benefits Energy savings from insulation value, local manufacturing, recycled content, and product longevity.





Your Local Authorized General Doors Distributor:

© 2019, General Doors Corporation

Printed in U.S.A.



1 Monroe Street PO Box 205 Bristol, PA 19007-0205 215.788.9277 Fax: 215.788.9450 general-doors.com sales@general-doors.com